

UV HOODS



MODELS

- DM-UV-JA-FS-CF
- DM-UV-JA-FS-BF
- DM-UV-JA-BF
- DM-UV-JA-FS-BF



Excellent Warranty Terms.
Ask Us about it



Ready? Talk to our Sales Rep
Call: +971 50 653 7348

WORKING TOWARDS GREEN ENVIRONMENT...

WHY DUMECHE UV HOODS?

- Stainless steel 304-grade or 316-grade construction.
- Fully automated operation.
- Eliminates grease deposits in the hood plenum and duct line.
- Highly efficient UL-listed Baffle filters / VDI-tested Cascade filters.
- IP 65, V-0 fire rates LED lights (Operating Temperature from -40°C to 150°C).
- Highly efficient UVC lamp with a UV lamp life of up to 16000 hrs.
- User-friendly HMI interface Control Panel.
- safety alarms are displayed in 3 levels (Low Airflow / Baffle filter /UV rack door).
- Auto shut off in case of fire (optional).
- IP65-rated Control Panel.
- Easy access to UV rack for maintenance.
- The "JET AIR VENT" principle was applied in introducing Makeup air to reduce the airflow to 70% against design requirements based on DW172 standards and thereby reducing the energy consumption.



ABOUT US

Dumech UV Hoods are more reliable and provide you with prudent investment which can, with proper installation, operation and regular maintenance gives trouble free operation and a long service life. DUMECH UV Hoods are highly efficient and are fully automated which can be used over variety of cooking operations.

Applications:


Fryer, Wok Burners, Griddle




FRANKE

CASCADE vs BAFFLE

VDI 2052 TEST DATA

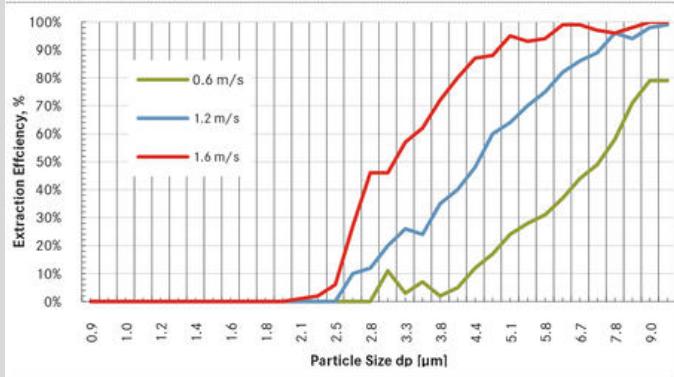

ATSM 2519 TEST DATA

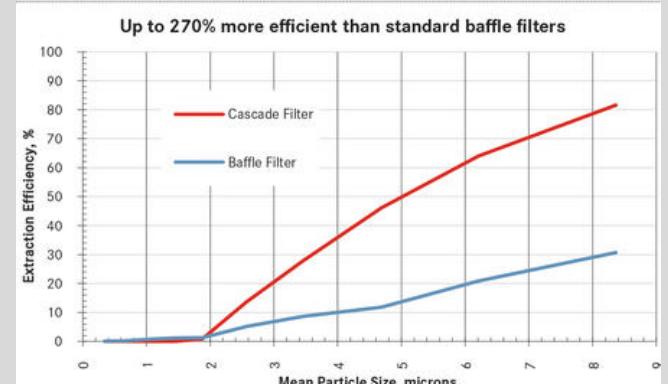

HOOD LIGHTS



- Meets DW172 requirements
- Made - Longar, UK

UV-C BALLAST/LAMPS



- Make - Robertson, USA
- UL/935
- CSA/C22.2 Certified
- RoHS Compliant
- CE Certified
- Lamp η : 16000 op. hrs